

Heat shrinkable straight-through joint
for unarmoured polymeric cables

Universally suitable for connecting polymeric cables or conductors insulated with PVC, PE and XLPE (e.g. N(A)YY, NYM, TT). Suitable for compression connectors on aluminium or copper cables.




Product description

Article name	SMH4 PL-4/95-150
Article number	247465
Notes	Poland version
Optional accessory	Compression connectors (see Connecting technology)

Characteristics
Compact dimensions
Wide conductor and cross-section range
Resistant to chemical agents
Resistant to alkaline earth elements
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
Transversely waterproof
High electrical insulating values
High mechanical strength

Applications
Indoor
Outdoor
Underground
Water
Installation ducts
Ductwork

Technical Data

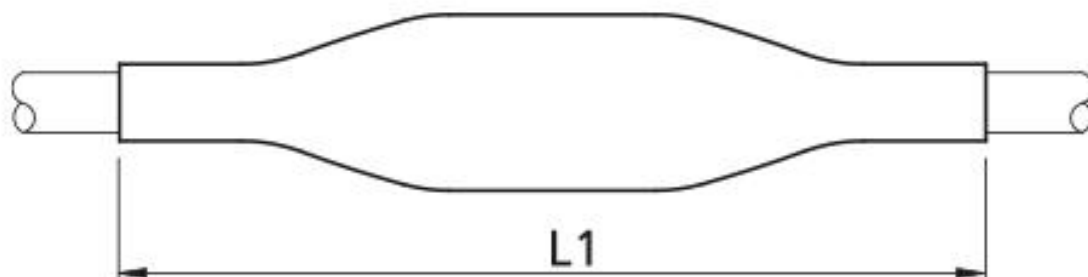

Article name	SMH4 PL-4/95-150
Article number	247465
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Article notes	Poland version
Length L1	1000 mm
Nominal cross section Polymeric cable unarmoured per conductor 4x min	95 mm ²
Nominal cross section Polymeric cable unarmoured per conductor 4x max	150 mm ²

Commercial Data

Article name	SMH4 PL-4/95-150
Article number	247465
Delivery scope	Outer sleeve
	Inner sleeves
	Cleaning tissue
	Emery cloth
	Installation instruction
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900
EAN/GTIN	4010311131559

Packaging data

Packaging type	Bag1	Pallet
Content quantity	1	100
Unit of measure	Piece	Piece
Lenght (mm)	1010	1200
Width (mm)	200	800
Height (mm)	850	1200
Net weight (kg)	0.492	49.2
Gross weight (kg)	0.492	67.4